


DEMS 240A - 240B

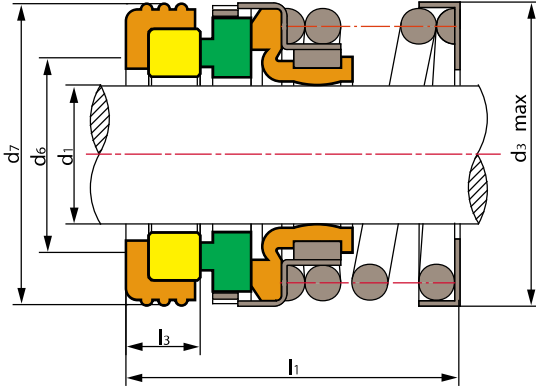

Çalışma Limitleri

Basınç: ≤ 1 MPa
 Hız: ≤ 12 m/s
 Sıcaklık: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

Operating Limits

Pressure: ≤ 1 MPa
 Speed: ≤ 12 m/s
 Temperature: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

- Döner Yüzey (Plastic Carbon/Carbon/SiC/TC)
- Sabit Eleman (Ceramic/SiC/TC)
- Elastomer (NBR/EPDM/VITON)
- Yay & Diğer Parçalar(SUS304/SUS316)

- Rotary Ring(Plastic Carbon/Carbon/SiC/TC)
- Stationary Ring(Ceramic/SiC/TC)
- Secondary Seal(NBR/EPDM/VITON)
- Spring & Other Parts(SUS304/SUS316)

Model	d ₁ (mm)	d ₃	d ₆	d ₇	l ₁	l ₃
DEMS240 A-10	10	23.5	16	24	25.0	7.0
DEMS240 A-11	11	23.5	16	24	25.0	7.0
DEMS240 A-12	12	26.0	17	26	25.0	7.0
DEMS240 A-14	14	28.0	21	28	25.5	7.0
DEMS240 A-15	15	30.0	21	28	29.5	7.0
DEMS240 A-16	16	32.0	22	32	33.5	10.0
DEMS240 A-18	18	32.5	25	35	36.5	10.0
DEMS240 A-19	19	32.5	25	35	36.5	10.0
DEMS240 A-20	20	35.5	27	38	38.0	10.0
DEMS240 A-22	22	37.5	29	40	40.3	10.0
DEMS240 A-25	25	42.0	32	44	39.3	10.0
DEMS240 A-28	28	47.0	34	46	40.0	10.0
DEMS240 A-30S	30	46.0	35	45	38.2	7.5
DEMS240 A-30L	30	48.0	38	50	40.0	10.0
DEMS240 A-32	32	50.0	40	54	40.0	10.0
DEMS240 A-35	35	54.5	44	58	42.0	10.0
DEMS240 A-38	38	58.5	46	60	42.6	10.0
DEMS240 A-40	40	62.5	48	64	42.6	10.0
DEMS240 A-45	45	66.5	52	66	45.0	10.0
DEMS240 A-50	50	72.5	58	72	54.6	11.5
DEMS240 A-55S	55	72.0	60	75	59.4	12.0

Model	d ₁ (mm)	d ₃	d ₆	d ₇	l ₁	l ₃
DEMS240A-60	55	76.0	60	78	59.8	12.0
DEMS240A-60	60	80.0	65	80	63.0	12.0
DEMS240A-65	65	85.0	70	85	64.0	13.0
DEMS240A-70	70	92.0	75	92	60.0	11.0
Model	d ₁ (inches)	d ₃	d ₆	d ₇	l ₁	l ₃
DEMS240B-3/8"	9.525	23.5	14.3	22.230	28.6	7.9
DEMS240B-1/2"	12.700	26.0	17.5	25.400	28.6	7.9
DEMS240B-5/8"	15.875	30.0	20.6	31.750	32.5	10.3
DEMS240B-3/4"	19.050	32.5	23.8	34.930	32.5	10.3
DEMS240B-7/8"	22.225	37.5	27.0	38.100	34.1	10.3
DEMS240B-1"	25.400	44.0	30.2	41.280	36.5	11.1
DEMS240B-1 1/8"	28.575	48.0	33.3	44.450	38.1	11.1
DEMS240B-1 1/4"	31.750	50.0	36.5	47.630	38.1	11.1
DEMS240B-1 3/8"	34.925	54.5	39.7	50.800	39.7	11.1
DEMS240B-1 1/2"	38.100	58.5	42.9	53.980	39.7	11.1
DEMS240B-1 5/8"	41.275	64.0	46.0	60.330	47.6	12.7
DEMS240B-1 3/4"	44.450	67.0	49.2	63.500	47.6	12.7
DEMS240B-1 7/8"	47.625	71.0	52.4	66.680	50.8	12.7
DEMS240B-2"	50.800	73.5	55.6	69.850	50.8	12.7
DEMS240B-2 1/8"	53.975	75.6	\	76.200	57.2	14.3
DEMS240B-2 1/4"	57.150	80.0	65.0	79.380	57.2	14.3
DEMS240B-2 3/8"	60.325	79.6	\	82.550	57.2	14.3
DEMS240B-2 1/2"	63.500	84.9	70.0	85.730	60.3	14.3
DEMS240B-2 5/8"	66.675	84.6	\	85.725	65.1	15.9
DEMS240B-2 3/4"	69.850	93.0	\	88.900	65.1	15.9
DEMS240B-3"	76.200	102.0	\	98.425	68.3	15.9