


DEMS 240

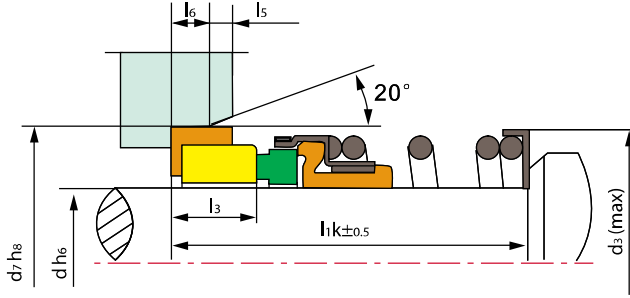

Çalışma Limitleri

Basınç: ≤ 1 MPa
 Hız: ≤ 10 m/s
 Sıcaklık: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

Operating Limits

Pressure: ≤ 1 MPa
 Speed: ≤ 10 m/s
 Temperature: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

- Döner Yüzey (Carbon/SiC/TC)
- Sabit Eleman (Ceramic/SiC/TC)
- Elastomer (NBR/EPDM/VITON)
- Yay & Diğer Parçalar (S.S/SUS304/SUS316)

- Rotary Ring(Carbon/SiC/TC)
- Stationary Ring(Ceramic/SiC/TC)
- Secondary Seal(NBR/EPDM/VITON)
- Spring & Other Parts(S.S/SUS304/SUS316)

20

Model	d (mm)	d ₃	d ₇	lk	l ₃	l ₅	l ₆
DEMS240-10	10	20.6	21	32.5	6.0	1.5	4
DEMS240-12	12	22	23	32.5	6.6	1.5	4
DEMS240-14	14	24	25	35.0	8.0	1.5	4
DEMS240-16	16	26	27	35.0	10.3	1.5	4
DEMS240-18	18	32	33	37.5	10.3	2.0	5
DEMS240-20	20	34	35	37.5	11.0	2.0	5
DEMS240-22	22	37	37	37.5	11.0	2.0	5
DEMS240-24	24	39	39	40.0	11.0	2.0	5
DEMS240-25	25	39	40	40.0	11.0	2.0	5
DEMS240-28	28	42	43	42.5	11.0	2.0	5
DEMS240-30	30	44	45	42.5	11.0	2.0	5
DEMS240-32	32	47	48	42.5	11.0	2.0	5
DEMS240-33	33	47	48	42.5	11.0	2.0	5
DEMS240-35	35	49	50	42.5	11.0	2.0	5
DEMS240-38	38	54	56	45.0	11.0	2.0	6
DEMS240-40	40	56	58	45.0	12.7	2.0	6
DEMS240-43	43	59	61	45.0	12.7	2.0	6

Model	d(mm)	d ₃	d ₇	lk	l ₃	l ₅	l ₆
DEMS240-45	45	62	63	45.0	12.7	2.0	6
DEMS240-48	48	64	66	45.0	12.7	2.0	6
DEMS240-50	50	66	70	47.5	12.7	2.5	6
DEMS240-53	53	69	73	47.5	13.5	2.5	6
DEMS240-55	55	72	75	47.5	14.2	2.5	6
DEMS240-58	58	80	78	52.5	14.2	2.5	6
DEMS240-60	60	80	80	52.5	14.2	2.5	6
DEMS240-63	63	83	83	52.5	14.2	2.5	6
DEMS240-65	65	85	85	52.5	16.0	2.5	6
DEMS240-68	68	88	90	52.5	16.0	2.5	7
DEMS240-70	70	90	92	60.0	16.0	2.5	7
DEMS240-75	75	99	97	60.0	16.0	2.5	7
DEMS240-80	80	104	105	60.0	16.0	3.0	7
DEMS240-85	85	108	110	60.0	16.0	3.0	7
DEMS240-90	90	114	115	65.0	16.0	3.0	7
DEMS240-95	95	119	120	65.0	16.0	3.0	7
DEMS240-100	100	124	125	65.0	16.0	3.0	7