


DEMS 9-912

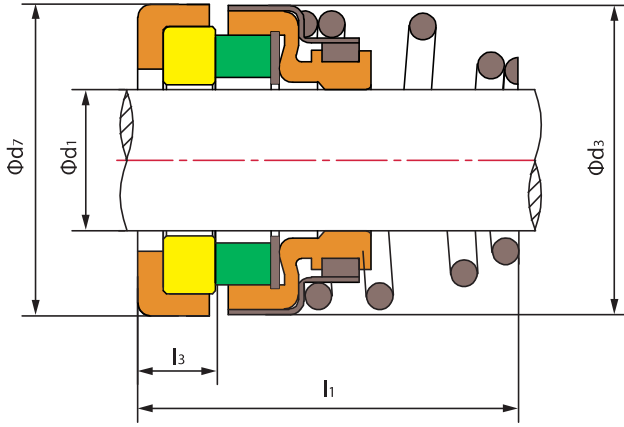

Çalışma Limitleri

Basınç: $\leq 1.0\text{MPa}$
 Hız: $\leq 10\text{m/s}$
 Sıcaklık: $-30^{\circ}\text{C} \sim +180^{\circ}\text{C}$

Operating Limits

Pressure: $\leq 1.0\text{MPa}$
 Speed: $\leq 10\text{m/s}$
 Temperature: $-30^{\circ}\text{C} \sim +180^{\circ}\text{C}$

- Döner Yüzey (Carbon/SiC/TC)
- Sabit Eleman (Ceramic/SiC/TC)
- Elastomer (NBR/VITON/EPDM)
- Yay ve Diğer Parçalar (SUS304/SUS316)

- Rotary Ring(Carbon/SiC/TC)
- Stationary Ring(Ceramic/SiC/TC)
- Secondary Seal(NBR/ VITON/EPDM)
- Spring & Other Parts(SUS304/SUS316)

Model	d_1	d_3	d_7	l_1	l_3
912-20	20	32	35	37.5	7.5
912-22	22	33.5	37	37.5	7.5
912-24	24	37	39	40	7.5
912-25	25	38	40	40	7.5
912-28	28	41	43	42.5	7.5
912-30	30	43	45	42.5	7.5
912-32	32	45	48	42.5	7.5
912-33	33	46	48	42.5	7.5
912-35	35	48	50	42.5	7.5
912-38	38	52.5	56	45	9
912-40	40	55.5	58	45	9
912-45	45	60.5	63	45	9
912-48	48	64	66	45	9
912-50	50	66	70	47.5	9.5
912-53	53	69	73	47.5	11
912-55	55	71	75	47.5	11
901-1 1/8"	28.575	41	44.45	52.37	11.1
901-1 3/8"	34.925	48	50.8	53.95	11.1
901-1 1/2"	38.1	52.5	54	53.95	11.1
901-1 3/4"	44.45	60.5	63.5	63.5	12.7