

DEMS 240DX




Çalışma Limitleri


Basınç: $\leq 0.3\text{MPa}$
 Hız: $\leq 10\text{ m/s}$
 Sıcaklık: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

Operating Limits

Pressure: $\leq 0.3\text{MPa}$
 Speed: $\leq 10\text{ m/s}$
 Temperature: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

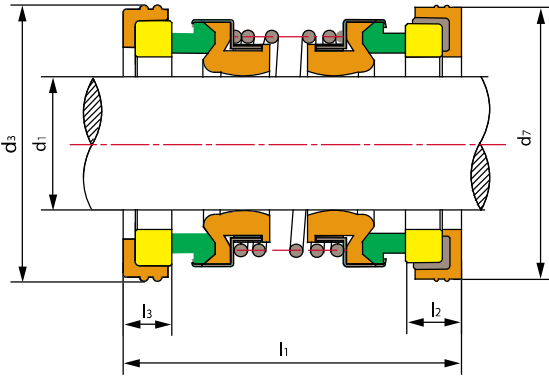

560D-13~16

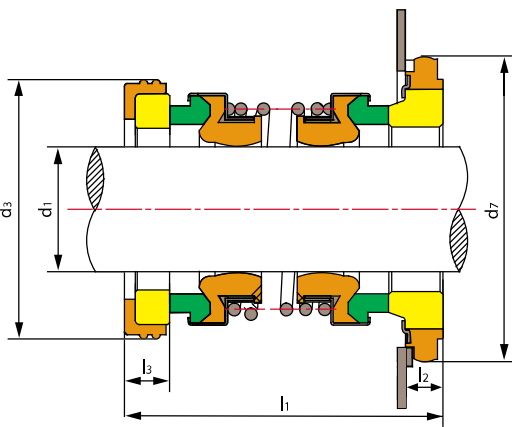

560D-18~50

- Döner Yüzey (Plastic Carbon/Carbon/SiC/TC)
- Sabit Eleman (Ceramic/SiC/TC)
- Elastomer (NBR/EPDM/VITON)
- Yay & Diğer Parçalar (SUS304/SUS316)
- Rotary Ring (Plastic Carbon/Carbon/SiC/TC)
- Stationary Ring (Ceramic/SiC/TC)
- Secondary Ring (NBR/EPDM/VITON)
- Spring and Other Parts (SUS304/SUS316)

Model	d ₁ (mm)	d ₃	d ₇	l ₁	l ₂	l ₃
DEMS240DX-13	13	25	25	36	5	5
DEMS240DX-14	14	30	30	37	5	5
DEMS240DX-15	15	30	30	37	5	5
DEMS240DX-16	16	30	30	37	5	5
DEMS240DX-18	18	35	38	49	7	10
DEMS240DX-19	19	35	38	49	7	10
DEMS240DX-20	20	38	44	49	7	7
DEMS240DX-25	25	44	50	51	7	7
DEMS240DX-30	30	50	57	59	9	8
DEMS240DX-35	35	58	64	61	9	9
DEMS240DX-40	40	64	70	64	11	9
DEMS240DX-45	45	66	70	65	10	9
DEMS240DX-50	50	72	80	69	10	9