


# DEMS FB

## Çalışma Limitleri

Basınç:  $\leq 0.3\text{MPa}$   
 Devir:  $\leq 9000\text{r/min}$   
 Sıcaklık:  $-30^{\circ}\text{C} \sim +150^{\circ}\text{C}$   
 Ortam: temiz su, deniz suyu, motor antifrizi

## Operating Limits

Pressure:  $\leq 0.3\text{MPa}$   
 Rotary Speed:  $\leq 9000\text{r/min}$   
 Temperature:  $-30^{\circ}\text{C} \sim +150^{\circ}\text{C}$   
 Medium: Clean water, seawater, gas engine antifreeze

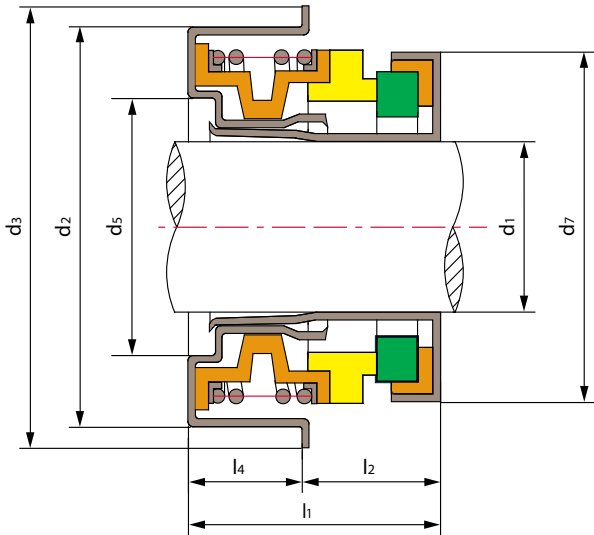

- Döner Yüzey (Ceramic/SiC)
- Sabit Eleman (Plastic Carbon/Carbon/SiC)
- Elastomer (NBR/EPDM/HNBR/VITON)
- Yay & Diğer Parçalar (SUS304/SUS316)
- Rotary Ring(Ceramic/SiC)
- Stationary Ring(Plastic Carbon/Carbon/SiC)
- Secondary Seal (NBR/EPDM/HNBR/VITON)
- Spring & Other Parts (SUS304/SUS316)

94

Model	d(mm)	d <sub>2</sub>	d <sub>3</sub>	d <sub>5</sub>	d <sub>7</sub>	l <sub>1</sub>	l <sub>2</sub>	l <sub>4</sub>
DEMSFB-12S	12	28.57	32.0	18.5	25	18.2	10.2	8.0
DEMSFB-12ST	12	28.57	32.0	18.5	26	18.2	10.2	8.0
DEMSFB-12M	12	30.00	35.0	18.5	25	18.2	10.2	8.0
DEMSFB-12MT	12	30.00	35.0	18.5	26	18.2	10.2	8.0
DEMSFB-12L	12	33.30	38.0	18.5	25	18.2	11.5	6.7
DEMSFB-12LT	12	33.30	38.0	18.5	26	18.2	11.5	6.7
DEMSFB-13	13	30.00	35.0	18.5	25	18.0	10.0	8.0
DEMSFB-15	15	36.50	41.5	22.5	30.5	20.5	12.0	8.5
DEMSFB-16	16	36.50	41.5	22.5	30.5	20.5	12.0	8.5
DEMSFB-16B	16	36.50	41.5	22.5	28.0	20.0	12.0	8.5
DEMSFB-16T	16	36.50	41.5	19.3	31.5	20.5	11.5	9.0
DEMSFB-16L	16	38.10	43.5	22.5	30.5	20.5	11.7	8.8
DEMSFB-16LD	16	38.10	43.5	22.5	28.5	20.5	11.7	8.8
DEMSFB-20	20	38/40	43.8	26.5	37.0	22.0	12.5	9.5
DEMSFB-20T	20	40.00	43.8	28.0	37.0	22.0	12.5	9.5