


# DEMS 260-26050

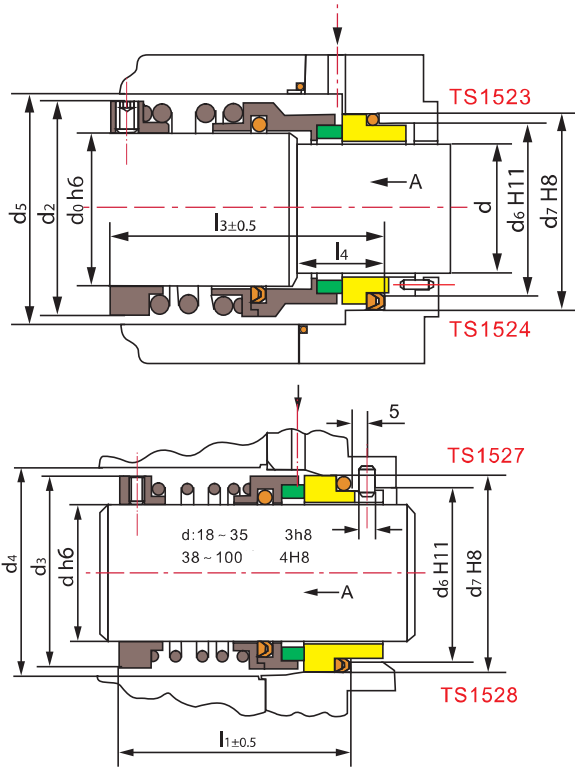

## Çalışma Limitleri

Basınç: 0~1MPa(TS1527,TS1528)  
≤3MPa(TS1523,TS1524)

Hız: ≤15m/s

Sıcaklık: -20°C~+180°C

## Operating Limits

Pressure: 0~1MPa(TS1527,TS1528)  
≤3MPa(TS1523,TS1524)

Speed: ≤15m/s

Temperature: -20°C~+180°C

- Döner Yüzey (SiC/TC/Carbon)
- Sabit Eleman (Carbon/SiC/TC)
- Elastomer(EPDM/MITON/PTFE)
- Yay & Diğer Parçalar(SUS304/SUS316)

- Rotary Ring (SiC/TC/Carbon)
- Stationary Ring (Carbon/SiC/TC)
- Secondary Seal(EPDM/MITON/PTFE)
- Spring & Other Parts(SUS304/SUS316)

Seal size d(mm)	d <sub>0</sub>	d <sub>3</sub>	d <sub>4</sub> min	d <sub>6</sub>	d <sub>7</sub>	d <sub>2</sub>	d <sub>5</sub> min	l <sub>3</sub>	l <sub>1</sub>	l <sub>4</sub>
18	22	32	34	27	33	36	38	55	45	20
20	24	34	36	29	35	38	40	60	45	20
22	26	36	38	31	37	40	42	60	45	20
24	28	38	40	33	39	42	44	60	50	20
25	30	39	41	34	40	44	46	60	50	20
28	33	42	44	37	43	47	49	65	50	20
30	35	44	46	39	45	49	51	65	50	20
32	38	46	48	42	48	54	58	65	55	20
33	38	47	49	42	48	54	58	65	55	20
35	40	49	51	44	50	56	60	65	55	20
38	43	54	58	49	56	59	63	75	55	23
40	45	56	61	51	58	61	65	75	55	23
43	48	59	63	54	61	64	68	75	60	23
45	50	61	65	56	63	66	70	75	60	23
48	53	64	68	59	66	69	73	85	60	23

Seal size d(mm)	d <sub>0</sub>	d <sub>3</sub>	d <sub>4</sub> min	d <sub>6</sub>	d <sub>7</sub>	d <sub>2</sub>	d <sub>5</sub> min	l <sub>3</sub>	l <sub>1</sub>	l <sub>4</sub>
50	55	66	70	62	70	71	75	85	60	25
53	58	69	73	65	73	78	83	85	70	25
55	60	71	75	67	75	80	85	85	70	25
58	63	78	83	70	78	83	88	85	70	25
60	65	80	85	72	80	85	90	95	70	25
63	68	83	88	75	83	88	93	95	70	25
65	70	85	90	77	85	90	95	95	80	25
68	73	88	93	81	90	93	98	95	80	28
70	75	90	95	83	92	99	104	95	80	28
75	80	99	104	88	97	104	109	105	80	28
80	85	104	109	95	105	109	114	105	90	28
85	90	109	114	100	110	114	119	105	90	28
90	95	114	119	105	115	119	124	105	90	28
95	100	119	124	110	120	124	129	105	90	28
100	105	124	129	115	125	129	134	105	90	28