


# DEMS 580



John Crane Type 2 muadili

DEMS 580 Replace John Crane Type 2

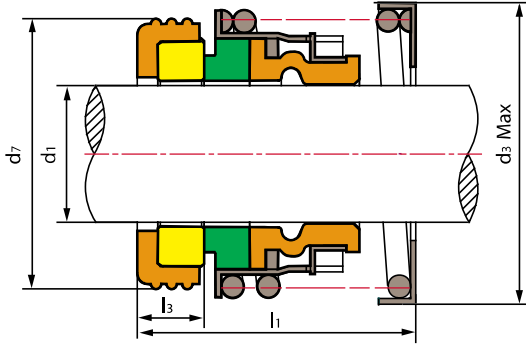

## Çalışma Limitleri

Basınç:  $\leq 2.8\text{MPa}$

Hız:  $\leq 13\text{ m/s}$

Sıcaklık:  $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

## Operating Limits

Pressure:  $\leq 2.8\text{MPa}$

Speed:  $\leq 13\text{ m/s}$

Temperature:  $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

- Döner Yüzey (Carbon/SiC/TC)
- Sabit Eleman (Ceramic/SiC/TC)
- Elastomer (NBR/EPDM/VITON)
- Yay & Diğer Parçalar (SUS304/SUS316)

- Rotary Ring(Carbon/SiC/TC)
- Stationary Ring(Ceramic/SiC/TC)
- Secondary Seal(NBR/EPDM/VITON)
- Spring & Other Parts(SUS304/SUS316)

Model	d <sub>1</sub> (inches)	d <sub>3</sub>	d <sub>7</sub>	l <sub>1</sub>	l <sub>3</sub>
TS580-3/8"	9.525	28	24.60	33.7	8.7
DEMS580-1/2"	12.700	32	27.80	33.7	8.7
DEMS580-5/8"	15.875	35	30.95	35.3	10.3
DEMS580-3/4"	19.050	40	34.15	35.3	10.3
DEMS580-7/8"	22.225	43	37.30	35.3	10.3
DEMS580-1"	25.400	47	40.50	35.3	10.3
DEMS580-1 1/8"	28.575	56	47.65	44.9	11.9
DEMS580-1 1/4"	31.750	59	50.80	44.9	11.9
DEMS580-1 3/8"	34.925	63	54.00	44.9	11.9
DEMS580-1 1/2"	38.100	67	57.15	44.9	11.9
DEMS580-1 5/8"	41.275	71	60.35	44.9	11.9
DEMS580-1 3/4"	44.450	74	63.50	52.9	11.9
DEMS580-1 7/8"	47.625	77	66.70	52.9	11.9
DEMS580-2"	50.800	81	69.85	54.5	13.5
DEMS580-2 1/8"	53.970	84	73.05	54.5	13.5
DEMS580-2 1/4"	57.150	88	76.20	54.5	13.5
DEMS580-2 3/8"	60.320	91	79.40	54.5	13.5
DEMS580-2 1/2"	63.500	94	82.55	54.5	13.5

Model	d <sub>1</sub> (inches)	d <sub>3</sub>	d <sub>7</sub>	l <sub>1</sub>	l <sub>3</sub>
DEMS580-20	20	41	35	35	10
DEMS580-22	22	41	37	35	10
DEMS580-24	24	47	39	35	10
DEMS580-25	25	47	40	35	10
DEMS580-28	28	51	43	44.9	11.9
DEMS580-30	30	55	45	43	10
DEMS580-32	32	55	48	44.9	11.9
DEMS580-35	35	56	50	43	10
DEMS580-38	38	66	56	44	11
DEMS580-40	40	67	58	44	11
DEMS580-43	43	72	61	52	11
DEMS580-45	45	72	63	52	11
DEMS580-48	48	76	66	52	11
DEMS580-50	50	80	70	52	11
DEMS580-55	55	88	75	53	12
DEMS580-60	60	91	80	53	12