


DEMS 400

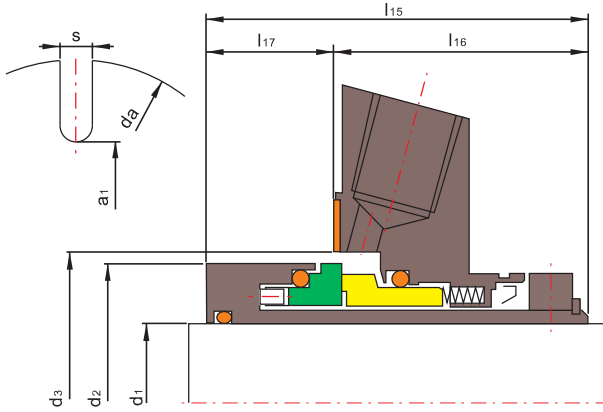

Çalışma Limitleri

Basınç: $\leq 2.5\text{MPa}$
 Hız: $\leq 16\text{m/s}$
 Sıcaklık: $-40^{\circ}\text{C} \sim +220^{\circ}\text{C}$

Operating Limits

Pressure: $\leq 2.5\text{MPa}$
 Speed: $\leq 16\text{m/s}$
 Temperature: $-40^{\circ}\text{C} \sim +220^{\circ}\text{C}$

- Döner Yüzey (SiC/TC)
 - Sabit Elemanlar (SiC/Carbon/TC)
 - Elastomer (VITON/AFLAS/Kalrez)
 - Diğer Parçalar (C-276/Duplex/316)
- Rotary Ring (SiC/TC)
 - Stationary Ring SiC/Carbon/TC)
 - Secondary Seal (VITON/AFLAS/Kalrez)
 - Other Parts (C-276/Duplex/316)

d ₁ (mm)	d ₂	d ₃		l ₁₅ (max.)	l ₁₆ (max.)	l ₁₇ (max.)	a ₁	d _a	s
		min	max						
25.0	43.0	44.0	51.5	79.5	53.4	26.1	62.0	105.0	13.2
28.0	46.0	47.0	52.0	79.5	53.4	26.1	62.0	105.0	13.2
30.0	48.0	49.0	56.0	79.5	53.4	26.1	65.0	105.0	13.2
32.0	49.8	51.0	57.0	79.5	53.4	26.1	67.0	108.0	13.2
33.0	49.8	51.0	57.0	79.5	53.4	26.1	67.0	108.0	13.2
35.0	53.0	54.0	61.5	79.5	53.4	26.1	70.0	113.0	13.2
38.0	56.0	57.0	66.0	79.5	53.4	26.1	75.0	123.0	13.2
40.0	58.0	59.0	68.0	79.5	53.4	26.1	75.0	123.0	14.2
42.0	60.5	61.5	69.5	79.5	53.4	26.1	80.0	133.0	14.2
43.0	60.5	61.5	70.5	79.5	53.4	26.1	80.0	133.0	14.2
45.0	62.5	64.0	73.0	79.5	53.4	26.1	81.0	138.0	14.2
48.0	65.6	67.0	75.0	79.5	53.4	26.1	84.0	138.0	14.2
50.0	68.0	69.0	78.0	79.5	53.4	26.1	87.0	148.0	14.2
53.0	72.0	73.0	87.0	79.5	53.4	26.1	97.0	148.0	18.0
55.0	73.0	74.0	83.0	79.5	53.4	26.1	90.0	148.0	18.0
60.0	78.0	79.0	91.0	79.5	53.4	26.1	102.0	157.0	18.0
65.0	84.8	85.7	98.5	79.5	53.4	26.1	109.0	163.0	18.0
70.0	93.0	95.0	108.0	79.5	53.4	26.1	118.0	178.0	18.0

d ₁ (inches)	d ₂	d ₃		l ₁₅ (max.)	l ₁₆ (max.)	l ₁₇ (max.)	a ₁	d _a	s
		min	max						
1.000	1.693	1.750	2.000	3.130	2.102	1.028	2.440	4.134	0.520
1.125	1.811	1.875	2.050	3.130	2.102	1.028	2.440	4.134	0.520
1.250	1.960	2.000	2.250	3.130	2.102	1.028	2.640	4.330	0.520
1.375	2.086	2.125	2.420	3.130	2.102	1.028	2.750	4.449	0.520
1.500	2.200	2.250	2.625	3.130	2.102	1.028	2.950	4.842	0.520
1.625	2.340	2.375	2.700	3.130	2.102	1.028	3.030	4.842	0.599
1.750	2.460	2.500	2.812	3.130	2.102	1.028	3.190	5.433	0.599
1.875	2.582	2.625	2.940	3.130	2.102	1.028	3.190	5.433	0.599
2.000	2.677	2.750	3.190	3.130	2.102	1.028	3.430	5.827	0.599
2.125	2.834	2.875	3.437	3.130	2.102	1.028	3.820	5.827	0.709
2.250	2.960	3.000	3.560	3.130	2.102	1.028	3.940	6.181	0.709
2.375	3.070	3.125	3.590	3.130	2.102	1.028	4.020	6.181	0.709
2.500	3.212	3.250	3.800	3.130	2.102	1.028	4.170	6.417	0.709
2.625	3.338	3.375	3.937	3.130	2.102	1.028	4.290	6.417	0.709
2.750	3.660	3.750	4.250	3.130	2.102	1.028	4.650	7.008	0.709