


DEMS F

Çalışma Limitleri

Basınç: $\leq 0.3\text{MPa}$
 Devir: $\leq 5000\text{r/min}$
 Sıcaklık: $-30^{\circ}\text{C} \sim +150^{\circ}\text{C}$
 Ortam: temiz su, deniz suyu, motor antifrizi

Operating Limits

Pressure: $\leq 0.3\text{MPa}$
 Rotary Speed: $\leq 5000\text{r/min}$
 Temperature: $-30^{\circ}\text{C} \sim +150^{\circ}\text{C}$
 Medium: Clean water, seawater, gas engine antifreeze

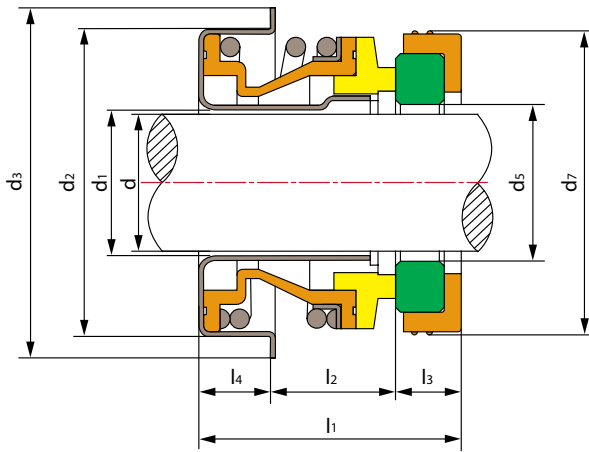

- Döner Yüzey (Ceramic/SiC)
- Sabit Eleman (Plastic Carbon/Carbon/SiC)
- Elastomer (NBR/EPDM/HNBR/VITON)
- Yay & Diğer Parçalar (SUS304/SUS316)
- Rotary Ring (Ceramic/SiC)
- Stationary Ring (Plastic Carbon/Carbon/SiC)
- Secondary Seal (NBR/EPDM/HNBR/VITON)
- Spring & Other Parts (SUS304/SUS316)

Model	d(inches)	d ₁	d ₂	d ₃	d ₅	d ₇	l ₁	l ₂	l ₃	l ₄
DEMSF-1/2"	12.700	14.2	30.00	35.0	13.5	25.400	19.2	5.0	6.2	8.0
DEMSF-5/8"	15.875	18.2	36.50	41.5	17.5	31.750	25.0	6.7	10.3	8.0
DEMSF-3/4"	19.050	21.2	40.00	43.8	21.0	34.925	25.8	5.5	10.3	10.0
DEMSF-1"	25.400	26.4	47.00	51.0	27.0	41.275	29.0	5.9	11.1	12.0
Model	d(mm)	d ₁	d ₂	d ₃	d ₅	d ₇	l ₁	l ₂	l ₃	l ₄
DEMSF-10	10	11.0	24.00	29.0	12	23	17.0	6.0	4	7.0
DEMSF-12S	12	14.2	28.57	32.0	14	25	18.2	5.2	5	8.0
DEMSF-12M	12	14.2	30.00	35.0	15	24	18.0	5.0	5	8.0
DEMSF-12L	12	14.2	33.30	38.0	14	25	18.0	6.3	5	6.7
DEMSF-16	16	18.2	36.50	41.5	18	31	19.8	6.8	5	8.0
DEMSF-16L	16	17.5	38.10	43.5	18	31	19.8	6.0	5	8.8
DEMSF-16LD	16	17.5	38.10	43.5	18	31	19.8	6.0	5	8.8
DEMSF-20S	20	21.2	38.00	43.8	21	35	20.5	5.5	5	10.0
DEMSF-20	20	21.2	40.00	43.8	21	35	20.5	5.5	5	10.0
DEMSF-25S	25	26.4	46.00	51.0	26	44	25.0	8.0	7	10.0
DEMSF-25	25	26.4	47.00	51.0	26	44	25.0	6.0	7	12.0
DEMSF-25L	25	26.4	52.00	57.0	27	48	25.0	6.0	7	12.0
DEMSF-30	30	31.0	52.00	57.0	32	48	27.0	8.0	8	11.0